

Meridian

APPLICATION:

- Decks, Railings, Gazebos, Outdoor Kitchens, Benches, Fences, Statues, Planters, Lanais, Kitchen Cabinets, Wine Racks...

DESIGNED and CONSTRUCTED for MAXIMUM HEAT TRANSFER:

- 6061 Aluminum - Clear Anodized (SSA Model)
- 6061 Aluminum - High Performance Enamel (AB, BLK, WHT Models)
- High Performance C360 Solid Brass (BR Model)

LED LIFE EXPECTANCY (TM-21 data):

- Greater than 60,000 hours (greater than 20 years at 8 hours per day)

DRIVER SYSTEM:

- Internal Driver constructed with advanced electronics, engineered for optimal heat transfer

INPUT VOLTAGE:

- 10.5 to 18 Volts AC

INSTALLATION and HARDWARE:

- Stainless steel Mounting Bracket and Screws included

LEAD WIRES:

- Total lead length is 72"

WARRANTY:

- Electronics: 20 years

CERTIFICATION:

- UL1838 Low Voltage Landscape Lighting



AVAILABLE FINISHES:

Architectural Bronze (AB)
Black (BLK)
C360 Solid Brass (BR)

Stainless Aluminum (SSA)
White (WHT)

LED DATA:


Single LED Output - 3,000K CCT Warm White

1.9VA
1.4 Watts

15W
Halogen
Equivalent

How To Order (Choose 1 Item From Each Column) ex: DL156 BLK

| Model # | Wattage | Optics | Finish | Light Output |
|-----------|-----------|--|--|--------------|
| DL | 15 | 6 (for 60°) 9 (for 90°) | AB BLK BR SSA WHT | (White) |

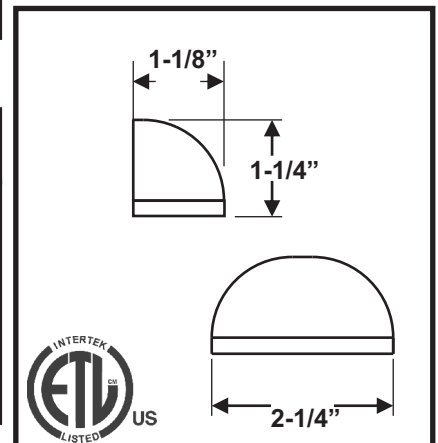

15 Watt

| Width | Distance | Lux |
|-------|----------|-----|
| 5 | 3 | 49 |
| 9.5 | 6 | 13 |
| 14.5 | 9 | 6 |
| 17 | 12 | 4 |

60 degree

| Width | Distance | Lux |
|-------|----------|-----|
| 9 | 3 | 25 |
| 17 | 6 | 5 |
| 20.5 | 9 | 2 |
| 24.5 | 12 | 1 |

90 degree

ADDITIONAL FINISHES



Lux testing performed in a controlled environment using AMPROBE LED meter.

Note: Color temperature may appear to vary depending on finish of fixture.