

Type: _____

Model: _____

Project: _____

SPECIFICATION SHEET

MODEL: Bayside

SPECIFICATIONS

HOUSING:

Cast brass with weathered brass finish. Threaded with O-ring. Decorative vents. Brass chain and canopy included.

SOCKET/LAMP HOLDER:

One fixed ceramic bi-pin socket with stainless steel retaining springs.

LENS:

No lens.

LAMP TYPE:

12V MR16 or bi-bin. LED recommended. 35W maximum.

MOUNTING:

17.5" brass chain (field-adjustable) and canopy mounting bracket.

WIRING:

Prewired with 5' pigtail of 18/2 cable.


WARRANTY:

Lifetime.



The Bayside hanging pendant is crafted from solid brass with a decorative vented shroud that casts a romantic light. Choose from various intensities of cool-white MR16 LED lamps for a moonlight effect, or a warm-white bi-pin or MR16 LED for a traditional lantern effect.

DIMENSIONS:

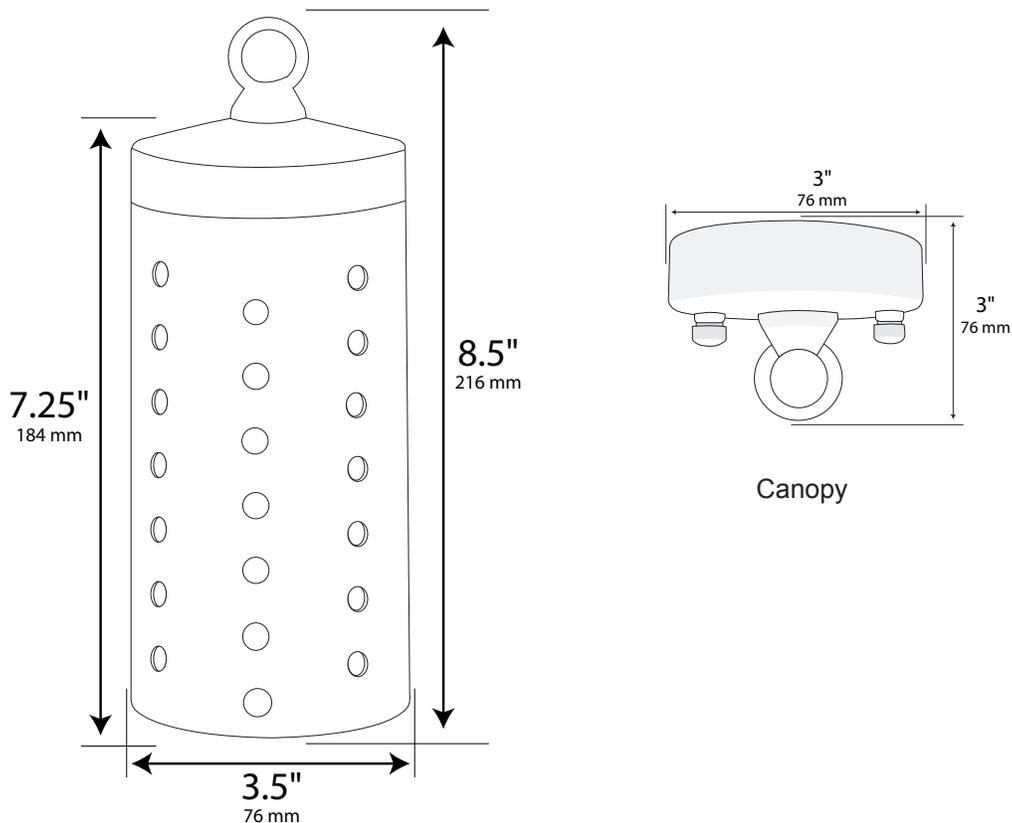

LED LAMP SPECIFICATIONS

LAMP TYPE:

12V MR16 UL-listed (E353116) lamp with 5-year warranty, dimmable, and suitable for enclosed luminaires, or Dauer bi-pin LED lamp.

OPTICS:

Integral optics providing available beam spreads from 15° to 100° for MR16 lamp (or no optics for bi-pin lamp).

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K or 2800K=ultra-warm; 3000K=warm white; 4000K=neutral white; and 5000K=cool white. Decorative color light options include amber, blue, green, and red.



FIXTURE	LAMP		
Bayside	WATTAGE	BEAM SPREAD	COLOR TEMP.
	MR16 (MR) 2W	25°	2700K / 3000K
	MR16 (MR) 4W	25°	2700K / 3000K
	MR16 (MR) 5W	15° / 25°	2700K / 3000K
		25°	Amber / Blue / Green / Red
	MR16 (MR) 6W	25°	2700K / 3000K
	MR16 (MR) 7W	25°	2700K / 3000K / 4000K / 5000K
	Bi-pin (BP) 2W encapsulated		2800K
	Bi-pin (BP) 4W encapsulated		2800K
	Bi-pin (BP) 5W encapsulated		2800K
Bi-pin 3.3W SMD		Amber / Blue / Green / Red	