

Type: \_\_\_\_\_

Model: \_\_\_\_\_

Project: \_\_\_\_\_

## SPECIFICATION SHEET

### MODEL: Brighton

#### SPECIFICATIONS

##### HOUSING:

Cast brass with weathered brass finish.

##### LENS:

Frosted flat tempered glass lens.

##### SOCKET/LAMP HOLDER:

One fixed ceramic bi-pin socket accepts bi-pin lamps with G4 and GY6.35 bases.

##### LAMP TYPE:

12V SMD or encapsulated bi-pin. 35W maximum.

##### MOUNTING:

Set-screw-locked 1/2" NPT brass coupling. Heavy-duty composite stake included. May be mounted into threaded hubs in junction boxes or mounting accessories shown on back page.

##### WIRING:

Prewired with 5' pigtail of 18/2 cable.


##### WARRANTY:

Lifetime.



Crafted from cast brass, the Brighton is a sculpted one-piece path light solution. The mounting coupling locks with set screws for precise rotational alignment. Frosted lens. Shroud option (included) to control glare.

### DIMENSIONS:

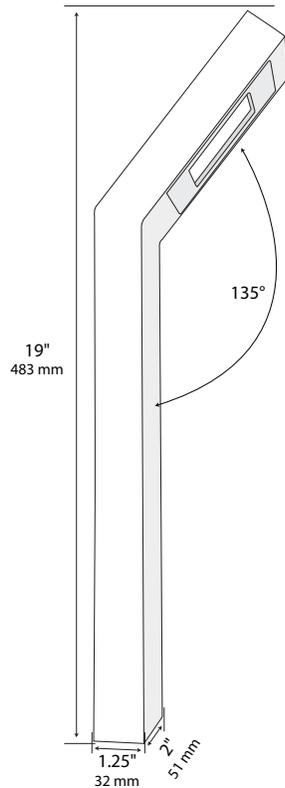

With optional (included) shroud and a round flat surface mount accessory (not included).

LED LAMP SPECIFICATIONS

**LAMP TYPE:**

IP65 outdoor-rated SMD or encapsulated bi-pin with 5-year warranty.

**COLOR TEMPERATURES:**

2800K warm white or 6000K cool white. Decorative and wildlife-approved color light options include blue, green, and sea-turtle-safe amber and red.



**FIXTURE ORDERING INFORMATION**

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 489910-490025-4W-E-2800K-MSS

FIXTURE		LAMP		MOUNTING
Brighton	WATTAGE	TYPE	COLOR TEMP.	<b>MSS</b> Slotted composite stake 490034
	2W	<b>E</b> Encapsulated bi-pin	2800K / 6000K	<b>M3</b> 3-prong tri-stake 490030
	3W	<b>E</b> Encapsulated bi-pin	2800K / 6000K	<b>MT</b> Trident heavy-duty three-prong stake 490036
	3.3W	<b>S</b> SMD bi-pin	Amber / Blue / Green / Red	<b>MPP</b> PVC power post stake 490037
	4W	<b>E</b> Encapsulated bi-pin	2800K	<b>MPM</b> Pier mount base
	5W	<b>S</b> SMD bi-pin	2800K	