

Type: _____

Model: _____

Project: _____

SPECIFICATION SHEET

MODEL: Plymouth II

SPECIFICATIONS

HOUSING:

Cast brass with weathered brass finish.

SOCKET/LAMP HOLDERS:

Bi-pin sockets in adjustable heads. Heads lock with set screws.

LENSES:

Clear flat tempered glass.

LAMP TYPES:

12V MR16 and MR8. LED recommended.

MOUNTING:

Composite stake included.

WIRING:

Prewired with 5' pigtail of 18/2 cable.

WARRANTY:


Lifetime.



Pat. pend.

The cast brass Plymouth II dual-source fixture is versatile as an uplight, path light, wall washer, or combination. Uses one MR16 and one MR8. Both enclosed heads can swivel and be locked with infinite precision, even in opposing directions, so that their beams can be precisely aimed both vertically and horizontally.

DIMENSIONS:

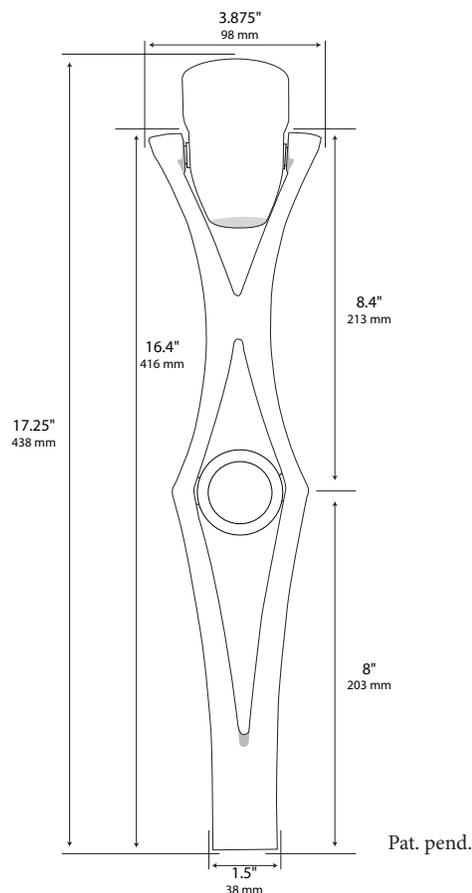

LED LAMP SPECIFICATIONS

LAMP TYPE:

MR16 UL-listed (E353116) 12V lamp and MR8 12V lamp with 5-year warranty.

OPTICS:

Integral optics providing available beam spreads from 15° to 100°.

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K or 2800K=ultra-warm; 3000K=warm white; 4000K=neutral white; 5000K=cool white. Decorative color light options include amber, blue, green, and red.



Pat. pend.

FIXTURE	MR16 LAMP			MR8 LAMP (2W/2800K)	MOUNTING	RISER
Plymouth II	WATTAGE	BEAM SPREAD	COLOR TEMP.	BEAM SPREAD	MS Composite stake (incl.) 490029	R2 2" brass riser 490038
	MR16 2W	25°/40°/60°/100°	2700K/3000K	MR8 30°/60°/100°	M3 3-prong tri-stake 490030	R3 3" brass riser 490039
	MR16 4W	25°/40°/60°/100°	2700K/3000K		MR Round 3-hole surface mount 490048	R6 6" brass riser 490031
	MR16 5W	15°/25°/40°/60°/100°	2700K/3000K		MP PVC mounting stake 490037	R12 12" brass riser 490032
		25°	Amber/Blue/Green/Red			R24 24" brass riser 490033
	MR16 6W	25°/40°/60°	2700K/3000K			
	MR16 7W	25°/40°	2700K/3000K/4000K/5000K			
		60°	2700K/3000K			