

Type: _____

Model: _____

Project: _____

SPECIFICATION SHEET

MODEL: Pimlico

SPECIFICATIONS

HOUSING:

Cast brass with weathered brass finish.

LENS:

Clear tempered glass lens.

STEMS:

10", 18" and 60" stems are sold separately.

SOCKET/LAMP HOLDER:

One fixed ceramic bi-pin socket in stem accepts bi-pin lamps with G4 and GY6.35 bases.

LAMP TYPE:

12V SMD or encapsulated bi-pin. 35W maximum.

MOUNTING:

Stem threaded with 1/2" NPT. Heavy-duty composite stake included with stem. May be mounted into threaded hubs in junction boxes or mounting accessories shown on back page.

WIRING:

Stem prewired with 5' pigtail of 18/2 cable.


WARRANTY:

Lifetime.



The hat of the Pimlico cast brass path light is cut to allow installation against a wall or shrubs. 6.5-inch-diameter cast brass hat. Reflective powder-coated interior. Clear lens. Socketed and wired brass stems, sold separately, are available in 10-inch, 18-inch, and 60-inch lengths.

DIMENSIONS:

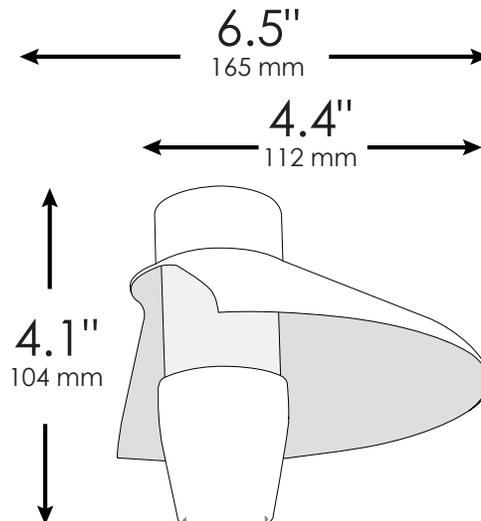

LED LAMP SPECIFICATIONS

LAMP TYPE:

IP65 outdoor-rated SMD or encapsulated bi-pin with 5-year warranty.

COLOR TEMPERATURES:

2800K warm white or 6000K cool white. Decorative and wildlife-approved color light options include blue, green, and sea-turtle-safe amber and red.



FIXTURE	STEM	LAMP			MOUNTING		RISER	
Pimlico	490025 (10")	WATTAGE	TYPE	COLOR TEMP.	MS Composite stake (incl.) 490029 M3 3-prong tri-stake 490030 MR Round 3-hole surface mount 490048 MP PVC mounting stake 490037	R2 2" brass riser 490038 R3 3" brass riser 490039 R6 6" brass riser 490031 R12 12" brass riser 490032 R24 24" brass riser 490033		
		2W	E Encapsulated bi-pin	2800K / 6000K				
	490026 (18")	2.2W	S SMD bi-pin	2800K				
		490027 (60")	3W	E Encapsulated bi-pin				
	3.3W		S SMD bi-pin	Amber / Blue / Green / Red				
	4W		E Encapsulated bi-pin S SMD bi-pin	2800K				
	5W	S SMD bi-pin	2800K					