

Type: _____

Model: _____

Project: _____

SPECIFICATION SHEET

MODEL: Cabo Tiki

SPECIFICATIONS

HOUSING:

Cast brass with weathered brass finish, integrated citronella tank.

STEMS:

10", 18" and 60" stems are sold separately.

SOCKET/LAMP HOLDER:

One fixed ceramic bi-pin socket in stem accepts bi-pin lamps with G4, GY6.35 and GU5.3 bases, including MR16 lamps.

LAMP TYPE:

12V MR16, SMD or encapsulated bi-pin. 35W maximum.

MOUNTING:

Stem threaded with 1/2" NPT. Heavy-duty composite stake included with stem. May be mounted into threaded hubs in junction boxes or mounting accessories shown on back page.

WIRING:

Stem prewired with 5' pigtail of 18/2 cable.


WARRANTY:

Lifetime.



The cast brass Cabo Tiki pathlight incorporates a citronella tank and wick for tiki torch drama. A brass cap on a chain covers the wick. Powder-coated reflective white undersurface. Brass stem options include 10-inch, 18-inch, and 60-inch lengths with sockets and leads. A variety of LED lamp choices are available.

DIMENSIONS:

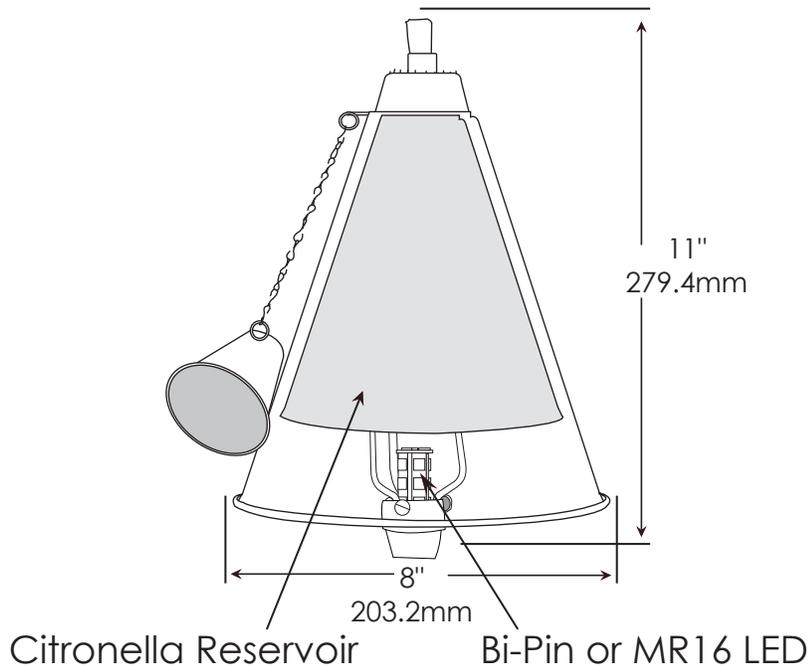

LED LAMP SPECIFICATIONS

LAMP TYPE:

MR16 25° beam angle, or IP65 outdoor-rated SMD or encapsulated bi-pin with 5-year warranty.

COLOR TEMPERATURES:

2800K or 3000K warm white; or 6000K cool white. Decorative and wildlife-approved color light options include blue, green, and sea-turtle-safe amber and red.



FIXTURE	STEM	LAMP			MOUNTING
		WATTAGE	TYPE	COLOR TEMP.	
Cabo Tiki	490025 (10")	2W	E Encapsulated bi-pin	2800K / 6000K	MS Composite stake (incl.) 490029
		3W	E Encapsulated bi-pin	2800K	M3 3-prong tri-stake 490030
	490026 (18")	3.3W	S SMD bi-pin	Amber / Blue / Green / Red	MY Y-bracket surface mount 490045
		4W	S SMD bi-pin	2800K	MG Brass gutter mount 490047
	490027 (60")	5W	S SMD bi-pin	2800K	MR Round 3-hole surface mount 490048
		5W	M MR16 25°	2700K / 3000K / Amber / Blue / Green / Red	MP PVC mounting stake 490037
		7W	M MR16 25°	2700K / 3000K	