

Type: \_\_\_\_\_

Model: \_\_\_\_\_

Project: \_\_\_\_\_

## SPECIFICATION SHEET

### MODEL: Cypress

#### SPECIFICATIONS

##### HOUSING:

Cast brass with weathered brass finish. Lock-and-load shroud with triple O-rings.

##### SOCKET/LAMP HOLDER:

One fixed ceramic bi-pin socket with stainless steel retaining springs.

##### LENS:

No lens.

##### LAMP TYPE:

12V MR16. LED recommended. 35W maximum.

##### MOUNTING:

Orbital swivel on end with brass Y-bracket included. Stem threaded with 1/2" NPT. May be mounted into threaded hubs in junction boxes or mounting accessories shown on back page.

##### WIRING:

Prewired with 5' pigtail of 18/2 cable.


##### WARRANTY:

Lifetime.



The small Cypress down light features an angled shroud from which a narrow or broad lamp can spread its light, precisely aimed by virtue of a locking orbital pivot. Shroud is adjustable in-and-out for beam control, and sealed by three O-rings. Y-bracket mount included.

### DIMENSIONS:

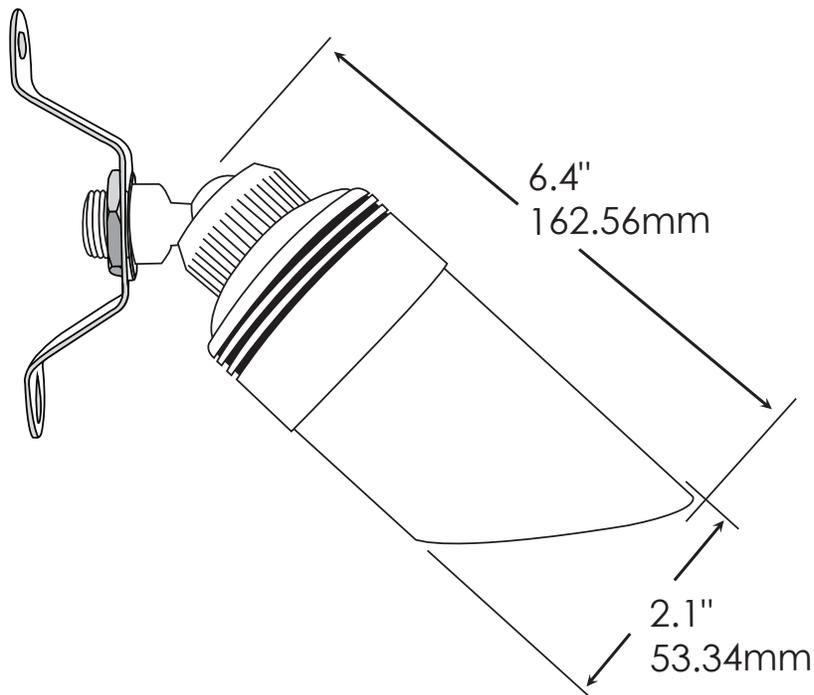

LED LAMP SPECIFICATIONS

**LAMP TYPE:**

12V MR16 UL-listed (E353116) lamp with 5-year warranty, dimmable, and suitable for enclosed luminaires.

**OPTICS:**

Integral optics providing available beam spreads from 15° to 60°.

**COLOR TEMPERATURES:**

Color temperature options provide the following qualities: 2700K=ultra-warm; 3000K=warm white; 4000K=neutral white; and 5000K=cool white. Decorative and wildlife-approved color light options include blue, green, and sea-turtle-safe amber and red.



FIXTURE		LAMP		MOUNTING	
Cypress	WATTAGE	BEAM SPREAD	COLOR TEMP.	<b>MY</b>	Y-bracket surface mount 490045
	2W	25° / 40° / 60°	2700K / 3000K	<b>MG</b>	Brass gutter mount 490047
	4W	25° / 40° / 60°	2700K / 3000K	<b>MR</b>	Round 3-hole surface mount 490048
	5W	15° / 25° / 40° / 60°	2700K / 3000K		
		25°	Amber / Blue / Green / Red		
	6W	25° / 40° / 60°	2700K / 3000K		
	7W	25° / 40°	2700K / 3000K / 4000K / 5000K		
		60°	2700K / 3000K		