

Type: _____

Model: _____

Project: _____

SPECIFICATION SHEET

MODEL: Belmont

SPECIFICATIONS

HOUSING:

Cast brass with weathered brass finish. Adjustable shroud with tension screw.

SOCKET/LAMP HOLDER:

One fixed ceramic bi-pin socket with stainless steel retaining springs.

LENS:

Clear tempered glass convex lens.

LAMP TYPE:

12V MR8. LED recommended. 35W maximum. See Dauer lamp ordering information on back page.

MOUNTING:

Stem threaded with 1/2" NPT. Heavy-duty composite stake included. May be mounted into threaded hubs in junction boxes or mounting accessories shown on back page.

WIRING:

Prewired with 5' pigtail of 18/2 cable.


WARRANTY:

Lifetime.



Accent your most cherished outdoor scenes with the cast brass Belmont uplight. Features an adjustable shroud to achieve the perfect beam spread or to control glare. Tempered glass convex lens. Mounting options include an included heavy-duty composite stake. Uses a warm-white MR8 LED.

DIMENSIONS:

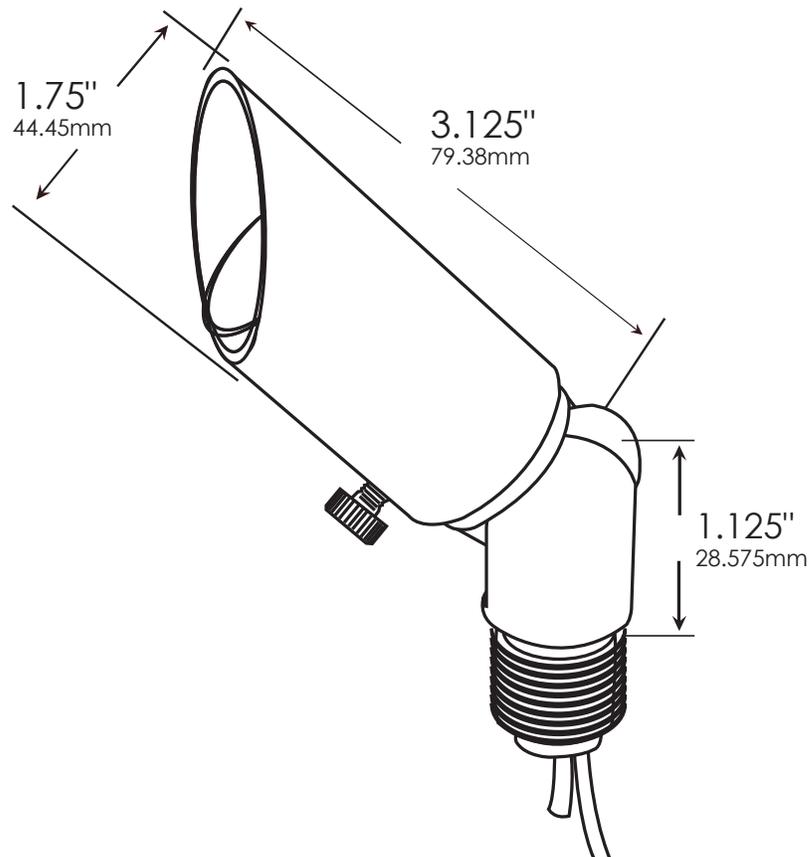

LED LAMP SPECIFICATIONS

LAMP TYPE:

12V 2 MR8 lamp with 5-year warranty, suitable for enclosed luminaires.

OPTICS:

Integral optics providing available beam spreads of 30° to 100°.

COLOR TEMPERATURE:

Color temperature of 2800K = warm white.



FITTURE	LAMP			MOUNT	RISER
	WATTAGE	BEAM SPREAD	COLOR TEMP.		
Belmont	2W	30° / 60° / 100°	2800K	MS Composite stake (incl.) 490029 M3 3-prong tri-stake 490030 MY Y-bracket surface mount 490045 MG Brass gutter mount 490047 MR Round 3-hole surface mount 490048 MP PVC mounting stake 490037	R2 2" brass riser 490038 R3 3" brass riser 490039 R6 6" brass riser 490031 R12 12" brass riser 490032 R24 24" brass riser 490033